



Dewberry Engineers Inc.
1000 North Ashley Drive, Suite 801
Tampa, FL 33602

813.225.1325
813.225.1385 fax
www.dewberry.com

CT Statewide- Final Accuracy Report

Report Produced for The State of Connecticut

Report Date: June 27, 2024

SUBMITTED BY:

Dewberry

1000 North Ashley Drive Suite 801
Tampa, FL 33602
813.225.1325

SUBMITTED TO:

State of Connecticut

450 Capitol Avenue
Hartford, Connecticut, 06106-1379

TABLE OF CONTENTS

1. Executive Summary	2
1.1 Project Area	2
1.2 Coordinate Reference System	3
2. Lidar Positional Accuracy	3
2.1 Final Swath Vertical Accuracy Assessment	4
2.2 Classified Lidar Vertical Accuracy Results	4
2.3 Final Horizontal Accuracy Results	5
2.3.1 Horizontal Accuracy Test Procedures	5
2.3.2 Horizontal Accuracy Results	6
3. DEM Positional Accuracy	6
4. Final Accuracy Summary	7

1. EXECUTIVE SUMMARY

The following report documents the comprehensive final project accuracy results for CT Statewide lidar project. Preliminary accuracy testing was verified for each delivery block to ensure project-wide accuracy would meet specification.

The CT Statewide lidar project survey report includes all information regarding the survey checkpoints, please refer to that report for details on the survey.

For accuracy testing, Dewberry typically uses proprietary software (which utilizes both Esri and lastools software within its workflow) to test the swath lidar vertical accuracy and classified lidar vertical accuracy, Esri software to test the horizontal lidar accuracy, and Esri software to test the DEM vertical accuracy. Below is a description of the types of checkpoints utilized and the acceptable criteria for the CT Statewide lidar project accuracy requirements.

NVA (Non-vegetated Vertical Accuracy) reflects the calibration and performance of the lidar sensor. NVA was determined with checkpoints located only in non-vegetated terrain, including open terrain (grass, dirt, sand, and/or rocks) and urban areas. In these locations it is likely that the lidar sensor detected the bare-earth ground surface and random errors are expected to follow a normal error distribution. Assuming a normal error distribution, the vertical accuracy at the 95% confidence level is computed as the vertical root mean square error (RMSE_z) of the checkpoints x 1.9600.

VVA (Vegetated Vertical Accuracy) was determined with all checkpoints in vegetated land cover categories, including tall grass, weeds, crops, brush and low trees, and fully forested areas. In these locations there is a possibility that the lidar sensor and post-processing may yield elevation errors that do not follow a normal error distribution. VVA at the 95% confidence level equals the 95th percentile error for all checkpoints in all vegetated land cover categories combined. The VVA is accompanied by a listing of the 5% outliers that are larger than the 95th percentile used to compute the VVA.

The relevant testing criteria are summarized in the table below.

Table 1. Vertical accuracy acceptance criteria

Land Cover Type	Quantitative Criteria	Measure of Acceptability
NVA	Accuracy in open terrain and urban land cover categories using RMSE _z *1.9600	19.6 cm (RMSE _z 10 cm)
VVA	Accuracy in vegetated land cover categories combined at the 95 th percentile	30 cm

1.1 Project Area

The CT Statewide lidar project encompasses approximately 5,241 square miles within the state of Connecticut. The figure below shows the checkpoints that were collected.

CT Statewide Lidar Project

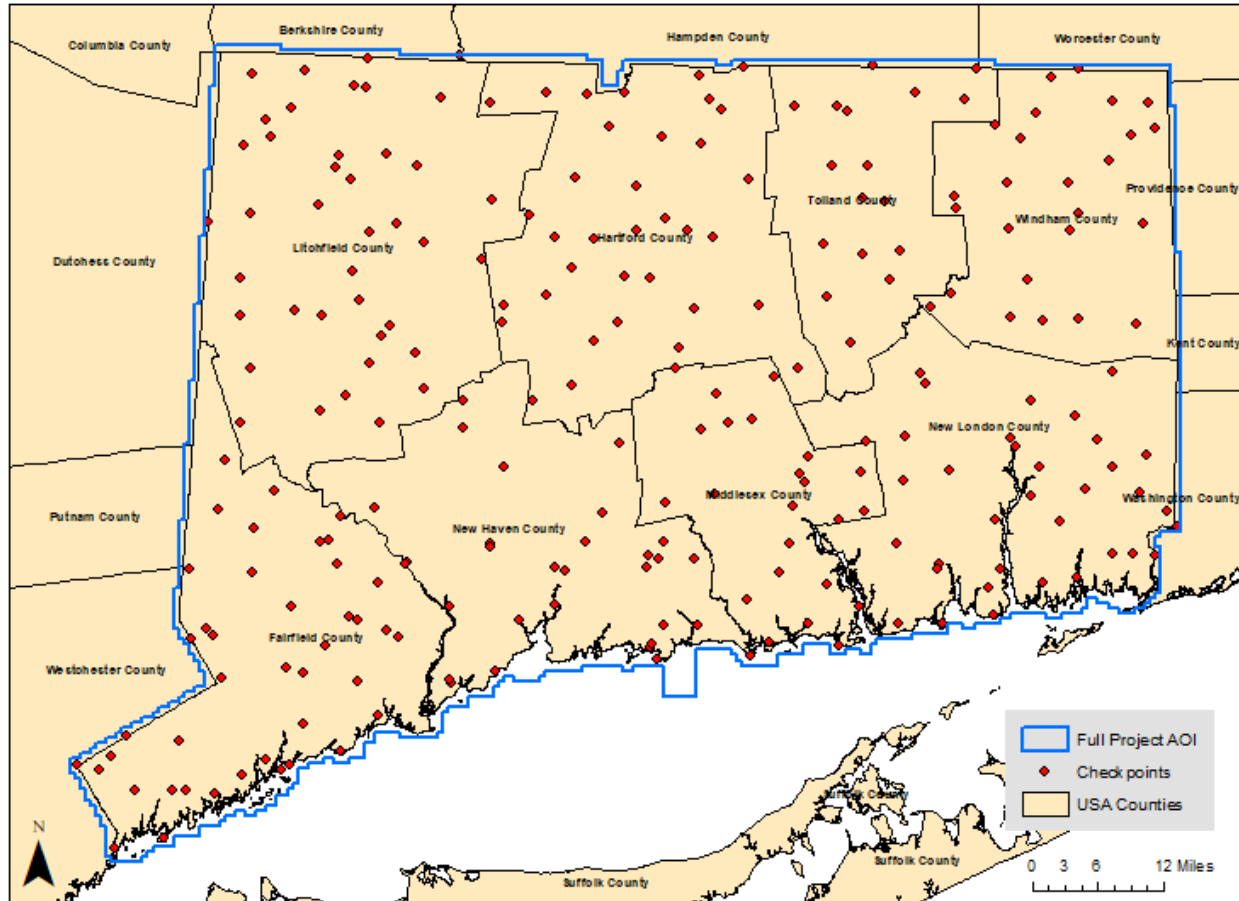


Figure 1. Project map with checkpoints.

1.2 Coordinate Reference System

Data produced for the project are delivered in the following spatial reference system:

Horizontal Datum:	North American Datum of 1983 with the 2011 Adjustment (NAD 83 (2011))
Vertical Datum:	North American Vertical Datum of 1988 (NAVD88)
Geoid Model:	Geoid18
Coordinate System:	State Plane Connecticut
Horizontal Units:	Feet
Vertical Units:	Feet

2. LIDAR POSITIONAL ACCURACY

Dewberry quantitatively tested the dataset by testing the vertical accuracy of the lidar. The vertical accuracy is tested by comparing the discrete measurement of the survey checkpoints to that of the interpolated value within the three closest lidar points that constitute the vertices of a three-dimensional

triangular face of the TIN. Therefore, the end result is that only a small sample of the lidar data is actually tested. However, there is an increased level of confidence with lidar data due to the relative accuracy. This relative accuracy in turn is based on how well one lidar point "fits" in comparison to the next contiguous lidar measurement and is verified as part of the initial processing. If the relative accuracy of a dataset is within specifications and the dataset passes vertical accuracy requirements at the location of survey checkpoints, the vertical accuracy results can be applied to the whole dataset with high confidence due to the passing relative accuracy.

2.1 Final Swath Vertical Accuracy Assessment

Dewberry tested the vertical accuracy of the non-vegetated terrain swath data prior to additional processing. Dewberry tested the vertical accuracy of the swath data using the non-vegetated (open terrain and urban) independent survey checkpoints. The vertical accuracy is tested by comparing survey checkpoints in non-vegetated terrain to a triangulated irregular network (TIN) that is created from the raw swath points. Only checkpoints in non-vegetated terrain can be tested against raw swath data because the data has not undergone classification techniques to remove vegetation, buildings, and other artifacts from the ground surface. Checkpoints are always compared to interpolated surfaces from the lidar point cloud because it is unlikely that a survey checkpoint will be located at the location of a discrete lidar point. Dewberry typically uses LP360 software to test the swath lidar vertical accuracy. The table below summarizes the swath project accuracy specification, the amount of NVA points tested, and the final tested swath accuracy results.

Table 2. NVA at 95% Confidence Level for Raw Swaths

100 % of Totals	# of Points	RMSEz (ft) NVA	NVA (ft) Spec=0.64	Mean (ft)	Median (ft)	Skew	Std Dev (ft)	Kurtosis	Min (ft)	Max (ft)
NVA	145	0.147	0.289	0.004	-0.004	0.098	0.148	0.356	-0.374	0.423

2.2 Classified Lidar Vertical Accuracy Results

The table below summarizes the tested vertical accuracy resulting from a comparison of the surveyed checkpoints to the elevation values present within the fully classified lidar LAS files.

Table 3. Tested NVA and VVA for the classified lidar

Land Cover Type	# of Points	NVA (ft)	VVA (ft)
Project Specification	215	0.640	0.980
NVA	145	0.284	-
VVA	102	-	0.413

This lidar dataset was tested to meet ASPRS Positional Accuracy Standards for Digital Geospatial Data (2014) for a 10 cm RMSEz Vertical Accuracy Class. Actual NVA accuracy was found to be RMSE_z =4 cm, equating to +/- 9 cm at 95% confidence level. Actual VVA accuracy was found to be +/- 13 cm at the 95th percentile.

Table 4 lists the 5% outliers that are larger than the VVA 95th percentile.

Table 4. VVA 5% Outliers

Point ID	State Plane Connecticut NAD83(2011), ft		NAVD88 Geoid 18, ft		Delta Z (ft)
	Easting X (ft)	Northing Y (ft)	Survey Z (ft)	Lidar Z (ft)	
VVA-21	930603.248	704575.520	544.540	544.961	+0.421
VVA-24	815680.386	692010.076	418.910	419.336	+0.426
VVA-36	780617.176	611228.140	215.080	215.552	+0.472
VVA-38	797621.439	585608.583	33.960	34.374	+0.414
VVA-43	1084994.622	667884.277	30.440	29.966	-0.474
VVA-98	822394.999	601912.052	84.580	85.006	+0.426

Table 5 provides overall descriptive statistics.

Table 5. Classified lidar vertical accuracy descriptive Statistics

100 % of Totals	# of Points	RMSEz (ft) NVA Spec=0.330	Mean (ft)	Median (ft)	Skew	Std Dev (ft)	Kurtosis	Min (ft)	Max (ft)
NVA	145	0.145	-0.008	-0.011	0.227	0.145	0.549	-0.375	0.420
VVA	102	N/A	0.074	0.058	0.249	0.148	1.867	-0.474	0.472

2.3 Final Horizontal Accuracy Results

Dewberry tested the horizontal accuracy of lidar datasets when checkpoints were photo-identifiable in the intensity imagery. Photo-identifiable checkpoints included checkpoints located at the ends of paint stripes on concrete or asphalt surfaces or checkpoints located at 90 degree corners of different reflectivity, e.g. a sidewalk corner adjoining a grass surface. The XY coordinates of checkpoints as viewed in the intensity imagery were compared to surveyed XY coordinates for each photo-identifiable checkpoint. The horizontal differences were used to compute the tested horizontal accuracy of the lidar.

2.3.1 Horizontal Accuracy Test Procedures

Horizontal accuracy testing requires well-defined checkpoints that can be identified in the dataset. Elevation datasets, including lidar datasets, do not always contain well-defined checkpoints suitable for horizontal accuracy assessment. However, the ASPRS Positional Accuracy Standards for Digital Geospatial Data (2014) recommends at least half of the NVA vertical checkpoints should be located at the ends of paint stripes or other point features visible on the lidar intensity image, allowing them to double as horizontal checkpoints.

Dewberry reviews all NVA checkpoints to determine which, if any, of these checkpoints are located on photo-identifiable features in the intensity imagery. This subset of checkpoints are then used for horizontal accuracy testing.

The primary QA/QC horizontal accuracy testing steps used by Dewberry are summarized as follows:

1. Dewberry's team surveyed QA/QC vertical checkpoints in accordance with the project's specifications and tried to locate half of the NVA checkpoints on features photo-identifiable in the intensity imagery.
2. Next, Dewberry identified the well-defined features in the intensity imagery.
3. Dewberry then computed the associated xy-value differences between the coordinates of the well-defined feature in the lidar intensity imagery and the ground truth survey checkpoints.
4. The data were analyzed by Dewberry to assess the accuracy of the data. Horizontal accuracy was assessed using NSSDA methodology where horizontal accuracy is calculated at the 95% confidence level. This report provides the results of the horizontal accuracy testing.

2.3.2 Horizontal Accuracy Results

Sixty-one checkpoints were determined to be photo-identifiable in the intensity imagery and were used to test the horizontal accuracy of the lidar dataset. As only sixty-one (61) checkpoints were photo-identifiable, the results are not statistically significant enough to report as a final tested value, but the results of the testing are still shown in the table below.

Using NSSDA methodology (endorsed by the ASPRS Positional Accuracy Standards for Digital Geospatial Data (2014)), horizontal accuracy at the 95% confidence level (called ACCURACY_r) is computed by the formula $RMSE_r * 1.7308$ or $RMSE_{xy} * 2.448$.

No horizontal accuracy requirements or thresholds were provided for this project. However, this data set was produced to meet ASPRS Positional Accuracy Standards for Digital Geospatial Data (2014) for a 41 cm $RMSE_x/RMSE_y$ horizontal accuracy class which equates to a positional horizontal accuracy = ± 1 meter at the 95% confidence level. Using this small sample of 13 photo-identifiable checkpoints, positional accuracy of this dataset was found to be $RMSE_x = 11.8$ cm and $RMSE_y = 12.5$ cm, which equates to ± 29.7 cm at the 95% confidence level.

Table 6. Horizontal accuracy of the classified lidar data at the 95% confidence level

Land Cover Type	# of Points	$RMSE_x$ (ft)	$RMSE_y$ (ft)	$RMSE_r$ (ft)	Accuracy _r (ft)
Project Target	-	1.340	1.900	3.280	3.280
Non-Vegetated Terrain	61	0.387	0.409	0.564	0.976

3. DEM POSITIONAL ACCURACY

The same 247 checkpoints that were used to test the vertical accuracy of the lidar were used to validate the vertical accuracy of the final DEM products. Accuracy results may vary between the source lidar and final DEM deliverable. DEMs are created by averaging several lidar points within each pixel, which may result in slightly different elevation values at each survey checkpoint when compared to the linearly interpolated TIN created from the source LAS. The vertical accuracy of the DEM was tested by comparing the elevation of a given surveyed checkpoint with the elevation of the horizontally coincident pixel in the DEM.

The table below summarizes the tested vertical accuracy results from the final DEM dataset.

Table 7. DEM vertical accuracy results

6/27/2024

Land Cover Category	# of Points	NVA (ft)	VVA (ft)
Project Specification	215	0.640	0.980
NVA	145	0.274	-
VVA	102	-	0.410

This DEM dataset was tested to meet ASPRS Positional Accuracy Standards for Digital Geospatial Data (2014) for a 10 cm RMSE_z Vertical Accuracy Class. Actual NVA accuracy was found to be RMSE_z = 4 cm, equating to +/- 8 cm at 95% confidence level. Actual VVA accuracy was found to be +/- 13 cm at the 95th percentile.

Table 8 lists the 5% outliers that are larger than the VVA 95th percentile.

Table 8. DEM VVA 5% outliers

Point ID	State Plane Connecticut NAD83(2011), ft		NAVD88 Geoid 18, ft		Delta Z, ft
	Easting (X)	Northing (Y)	Survey Z	Lidar Z	
VVA-24	815680.386	692010.076	418.910	419.372	+0.462
VVA-01	741226.416	597283.099	505.960	506.371	+0.411
VVA-36	780617.176	611228.140	215.080	215.502	+0.422
VVA-38	797621.439	585608.583	33.960	34.387	+0.427
VVA-98	822394.999	601912.052	84.580	84.994	+0.414
VVA-43	1084994.622	667884.277	30.440	29.907	-0.533

Table 9 provides overall descriptive statistics.

Table 9. Overall Descriptive Statistics

Land Cover Type	# of Points	RMSE _z (ft)	Mean (ft)	Median (ft)	Skew	Std Dev (ft)	Min (ft)	Max (ft)	Kurtosis
NVA	145	0.140	-0.012	-0.018	0.350	0.140	-0.368	0.420	0.850
VVA	102	-	0.073	0.061	0.136	0.149	-0.533	0.462	2.591

4. FINAL ACCURACY SUMMARY

Based on the accuracy testing conducted by Dewberry, the lidar and DEM dataset for the CT Statewide lidar project satisfies the project's pre-defined accuracy criteria as described throughout this report.