

# AIRBORNE LIDAR PROJECT REPORT



## SAIC LIDAR SCIENCE APPLICATIONS INTERNATIONAL CORPORATION (SAIC)

CONTRACT NUMBER: PO10020755\_R31

Woolpert Project Number: 66566  
November 2012



# AIRBORNE LIDAR PROJECT REPORT

## SAIC LIDAR

### CONTRACT: #66566

For:

Science Applications International Corporation  
(SAIC)  
14668 Lee Road  
Chantilly, VA 20151  
Tel 703.676.9315

By:

Woolpert  
4454 Idea Center Boulevard  
Dayton, OH 45430-1500  
Tel 937.461.5660

## Summary of Contents

Section 1 .....	Overview
Section 2 .....	Acquisition
Section 3 .....	LiDAR Data Processing
Section 4 .....	Final Accuracy Assessment
Section 5 .....	Final Deliverables

## List of Figures

Figure 3.1: Representative Graph from Day27512: N7079F and ALS LiDAR S/N 7177 .....	Section 3
Figure 3.2: Representative Graph from Day27512 of Combined Separation .....	Section 3
Figure 3.3: Representative Graph from Day27512 of Positional Accuracy .....	Section 3
Figure 3.4: Representative Graph from Day27512 of PDOP.....	Section 3

## List of Tables

Table 2.1: ALS70 LiDAR System Specifications... ..	Section 2
Table 2.2: Airborne LiDAR Acquisition Flight Summary .....	Section 2
Table 3.1: GNSS Base Station.....	Section 3
Table 4.1: Overall Vertical Accuracy Statistics.....	Section 4
Table 4.2: QA/QC Analysis UTM 16N, NAD83.....	Section 4

# SECTION 1: OVERVIEW

## TASK ORDER NAME: SAIC LIDAR

## WOOLPERT PROJECT #66566

This report contains a comprehensive outline of the airborne LiDAR data acquisition for Grand Rapids, MI for Science Applications International Corporation (SAIC). The project area was approximately 785 square kilometers. The LiDAR was processed to meet the Nominal Post Spacing (NPS) requirement of 1.0 meters. The NPS assessment is made against single swath, first return data located within the geometrically usable center portion (typically ~90%) of each swath.

The data was collected using a Leica ALS70 500 kHz Multiple Pulses in Air (MPIA) LiDAR sensor. This sensor collects up to four returns per pulse, as well as intensity data for the first three returns. If a fourth return was captured, the system does not record an associated intensity value. The aerial LiDAR was collected at the following sensor specifications:

Post Spacing (Minimum):	3.2 ft / 1.0 m
AGL (Above Ground Level) average flying height:	7500 ft / 2286 m
MSL (Mean Sea Level) average flying height:	7975 ft / 2431 m
Average Ground Speed:	150 knots / 173 mph
Field of View (full):	40 degrees
Pulse Rate:	230 kHz
Scan Rate:	35.5 Hz
Side Lap (Minimum):	25.0%

LiDAR data was produced in Universal Transverse Mercator (UTM) Zone 16N, North American Datum of 1983 (NAD83). Coordinate positions were specified in units of meters. The vertical datum used for the project was referenced to NAVD 1988, meters, Geoid12.

## SECTION 2: ACQUISITION

The LiDAR data was acquired with a Leica ALS70 500 kHz Multiple Pulses in Air (MPiA) LiDAR sensor system, on board Cessna 404's. The ALS70 LiDAR system, developed by Leica Geosystems of Heerbrugg, Switzerland, includes the simultaneous first, intermediate and last pulse data capture module, the extended altitude range module, and the target signal intensity capture module. The system software is operated on an OC50 Operation Controller aboard the aircraft.

The ALS70 500 kHz Multiple Pulses in Air (MPiA) LiDAR System has the following specifications:

Table 2.1 ALS70 LiDAR System Specifications

Specification	
Operating Altitude	200 - 3,500 meters
Scan Angle	0 to 75° (variable)
Swath Width	0 to 1.5 X altitude (variable)
Scan Frequency	0 - 200 Hz (variable based on scan angle)
Maximum Pulse Rate	500 kHz (Effective)
Range Resolution	Better than 1 cm
Elevation Accuracy	7 - 16 cm single shot (one standard deviation)
Horizontal Accuracy	5 - 38 cm (one standard deviation)
Number of Returns per Pulse	7 (infinite)
Number of Intensities	3 (first, second, third)
Intensity Digitization	8 bit intensity + 8 bit AGC (Automatic Gain Control) level
MPiA (Multiple Pulses in Air)	8 bits @ 1nsec interval @ 50kHz
Laser Beam Divergence	0.22 mrad @ 1/e <sup>2</sup> (-0.15 mrad @ 1/e)
Laser Classification	Class IV laser product (FDA CFR 21)
Eye Safe Range	400m single shot depending on laser repetition rate
Roll Stabilization	Automatic adaptive, range = 75 degrees minus current FOV
Power Requirements	28 VDC @ 25A
Operating Temperature	0-40°C
Humidity	0-95% non-condensing
Supported GNSS Receivers	Ashtech Z12, Trimble 7400, Novatel Millenium

Prior to mobilizing to the project site, Woolpert flight crews coordinated with the necessary Air Traffic Control personnel to ensure airspace access.

The LiDAR data was collected in one mission, as the weather permitted, to ensure consistent ground conditions across the project area.

An initial quality control process was performed immediately on the LiDAR data to review the data coverage, airborne GPS data, and trajectory solution. Any gaps found in the LiDAR data were relayed to the flight crew, and the area was re-flown.

Table 2.2 Airborne LiDAR Acquisition Flight Summary

Airborne LiDAR Acquisition Flight Summary			
Date of Mission	Lines Flown	Mission Time (UTC) Wheels Up/ Wheels Down	Mission Time (Local = EDT) Wheels Up/ Wheels Down
October 1, 2012	1-27	14:50-20:30	10:50AM-4:30PM

# SECTION 3: LIDAR DATA PROCESSING

## APPLICATIONS AND WORK FLOW OVERVIEW

1. Resolved kinematic corrections for three subsystems: inertial measurement unit (IMU), sensor orientation information and airborne GPS data. Developed a blending post-processed aircraft position with attitude data using Kalman filtering technology or the smoothed best estimate trajectory (SBET).  
**Software:** POSPac Software v. 5.3, POSGNSS Software v. 5.20, IPAS Pro v.1.35.
2. Calculated laser point position by associating the SBET position to each laser point return time, scan angle, intensity, etc. Created raw laser point cloud data for the entire survey in .LAS format. Automated line-to-line calibrations were then performed for system attitude parameters (pitch, roll, heading), mirror flex (scale) and GPS/IMU drift.  
**Software:** ALS Post Processing Software v.2.74, Proprietary Software, TerraMatch v. 12.01.
3. Imported processed .LAS point cloud data into project tiles. Resulting data were classified as ground and non-ground points with additional filters created to meet the project classification specifications. Statistical absolute accuracy was assessed via direct comparisons of ground classified points to ground RTK survey data. Based on the statistical analysis, the LiDAR data was then adjusted in relation to the survey ground control.  
**Software:** TerraScan v.12.005.
4. The .LAS files were evaluated through a series of QA/QC steps to eliminate remaining artifacts and small undulations from the ground class.  
**Software:** TerraScan v.12.005.

## GLOBAL NAVIGATION SATELLITE SYSTEM (GNSS)-INERTIAL MEASUREMENT UNIT (IMU) TRAJECTORY PROCESSING

### EQUIPMENT

Flight navigation during the LiDAR data acquisition mission is performed using IGI CCNS (Computer Controlled Navigation System). The pilots are highly skilled at maintaining their planned trajectory, while holding the aircraft steady and level. If atmospheric conditions are such that the trajectory, ground speed, roll, pitch and/or heading cannot be properly maintained, the mission is aborted until suitable conditions occur.

The aircraft are all configured with a NovAtel Millennium 12-channel, L1/L2 dual frequency Global Navigation Satellite System (GNSS) receivers collecting at 2 Hz.

All Woolpert aerial sensors are equipped with a Litton LN200 series Inertial Measurement Unit (IMU) operating at 200 Hz.

Woolpert survey crews were onsite, operating Global Navigation Satellite System (GNSS) Base Stations for the ground control and at Centennial Airport for the airborne GPS support. The base station used during the LiDAR acquisition mission is listed below:



Table 3.1: GNSS Base Station

Station	Latitude	Longitude	Ellipsoid Height (L1 Phase Center)
Name	(DMS)	(DMS)	(Meters)
GRAR CORS station	N 42°59'19.66771"	W 85°40'27.60934"	157.094

## DATA PROCESSING


All airborne GNSS and IMU data was post-processed and quality controlled using Applanix MMS software. GNSS data was processed at a 1 and 2 Hz data capture rate and the IMU data was processed at 200 Hz.

## TRAJECTORY QUALITY

The GNSS Trajectory, along with high quality IMU data are key factors in determining the overall positional accuracy of the final sensor data. See Figure 3.1 for the flight trajectory.

### Flight Trajectory

Figure 3.1: Representative Graph from Day27512: N7079F and ALS LiDAR S/N7177

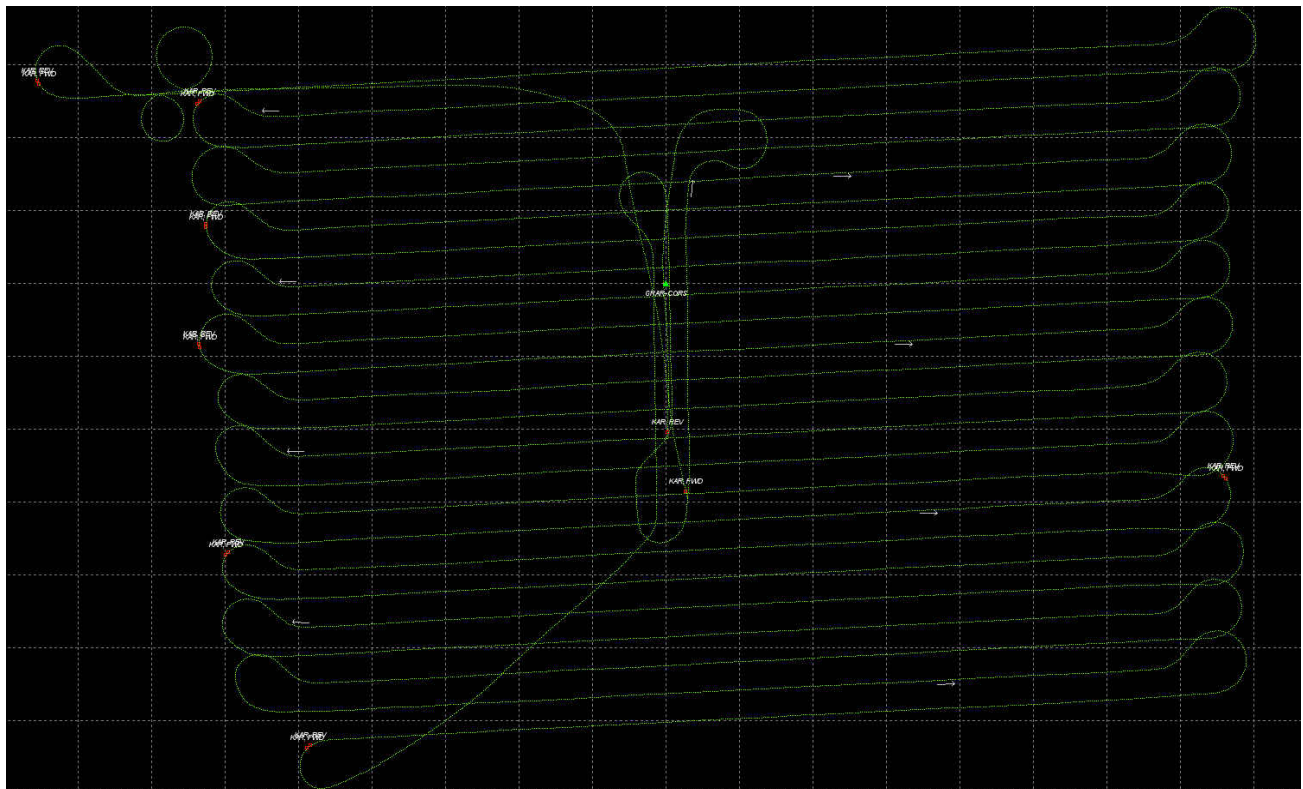




Within the trajectory processing, there are many factors that affect the overall quality, but the most indicative are the Combined Separation, the Estimated Positional Accuracy, and the Positional Dilution of Precision (PDOP).

## Combined Separation

The Combined Separation is a measure of the difference between the forward run and the backward run solution of the trajectory. The Kalman filter is processed in both directions to remove the combined directional anomalies. In general, when these two solutions match closely, an optimally accurate reliable solution is achieved.

Woolpert's goal is to maintain a Combined Separation Difference of less than ten (10) centimeters. In most cases we achieve results below this threshold. See Figure 3.2 for the combined separation graph.

Figure 3.2: Representative Graph from Day27512 of Combined Separation

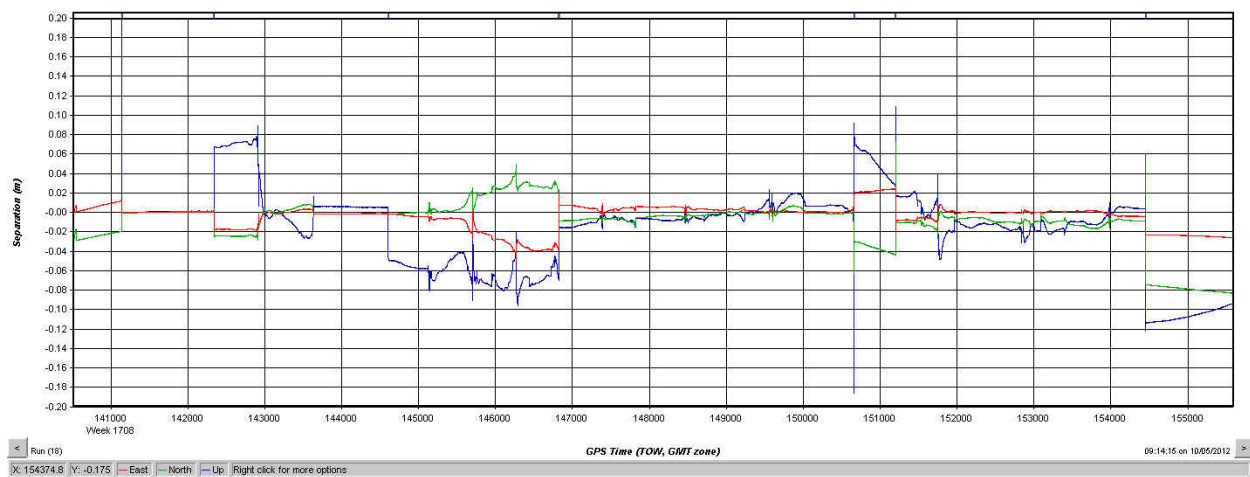


## Estimated Positional Accuracy

The Estimated Positional Accuracy plots the standard deviations of the east, north, and vertical directions along a time scale of the trajectory. It illustrates loss of satellite lock issues, as well as issues arising from long baselines, noise, and/or other atmospheric interference.

Woolpert's goal is to maintain an Estimated Positional Accuracy of less than ten (10) centimeters, often achieving results well below this threshold.


Figure 3.3: Representative Graph from Day27512 of Positional Accuracy

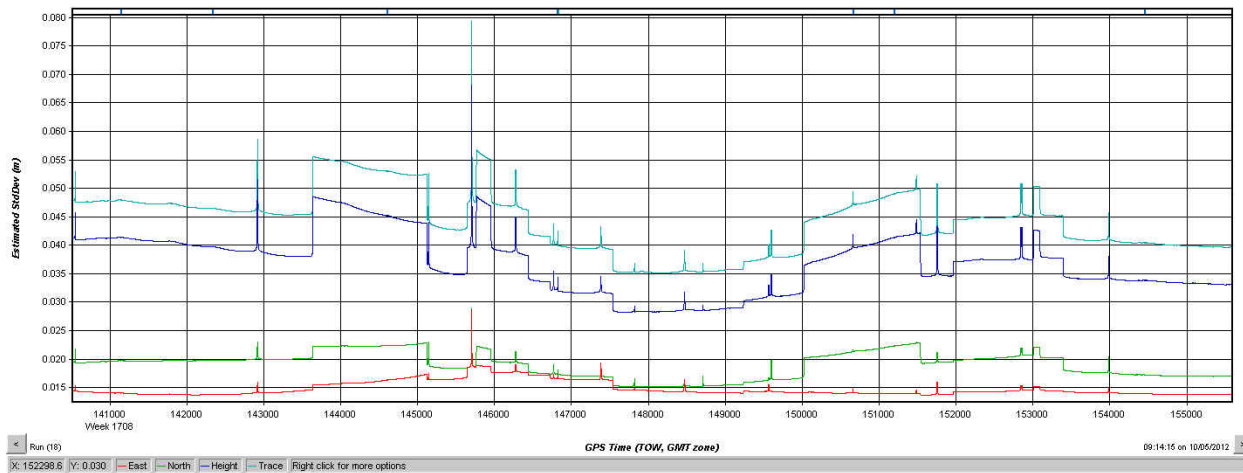

### Positional Dilution of Precision (PDOP)

The PDOP measures the precision of the GPS solution in regards to the geometry of the satellites acquired and used for the solution. Woolpert’s goal is to maintain an average PDOP value below 3.0. Brief periods of PDOP over 3.0 are acceptable due to the calibration and control process if other metrics are within specification. See Figure 3.4 for the PDOP Graph.

Figure 3.4 Representative Graph from Day27512 of PDOP

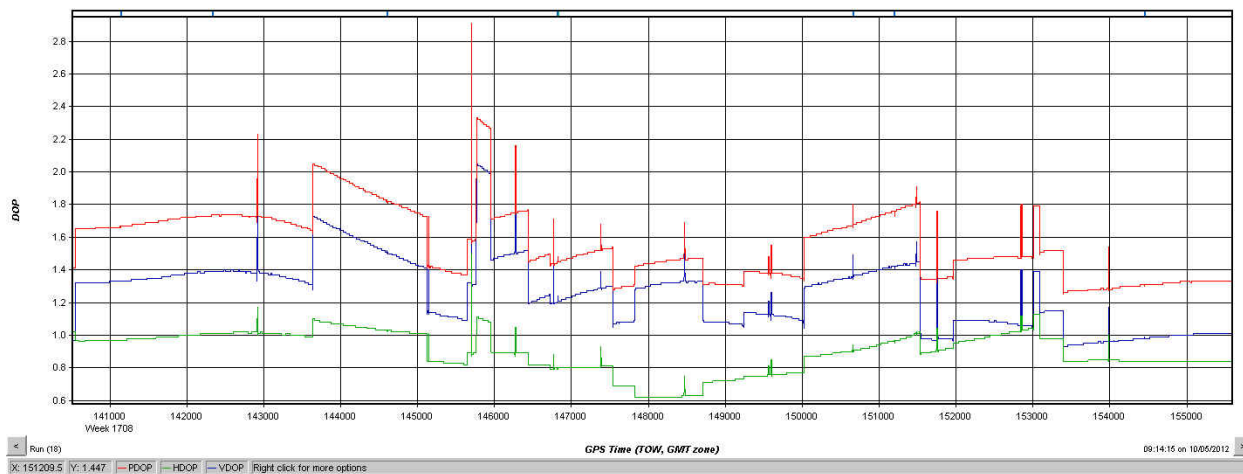

## LIDAR DATA PROCESSING

When the sensor calibration, data acquisition, and GPS processing phases were complete, the formal data reduction processes by Woolpert LiDAR specialists included:

- Processed individual flight lines to derive a “Point Cloud”. Matched overlapping flight lines, generated statistics for evaluation comparisons, and made the necessary adjustments to remove any residual systematic error.

- Calibrated LAS files were imported into project tiles and initially filtered to create a ground and non-ground class. Then additional classes are filtered as necessary to meet client specified classes.
- Once all project data was imported and classified, cross flights and survey ground control data was imported and calculated for an accuracy assessment. As a QA/QC measure, Woolpert has developed a routine to generate accuracy statistical reports by comparison among LiDAR points, ground control, and TINs. The LiDAR is adjusted accordingly to meet or exceed the vertical accuracy requirements.
- The LiDAR data in LAS format was reviewed using a series of proprietary QA/QC procedures to ensure it fulfills the project requirements.
- The LiDAR LAS files for this project have been classified into the Default (Class 1), Ground (Class 2), Noise (Class 7), and Vegetation (Class 5) classifications.
- Final deliverable data was derived from the adjusted classified LiDAR data.

# SECTION 4: FINAL ACCURACY ASSESSMENT

## FINAL VERTICAL ACCURACY ASSESSMENT

The vertical accuracy statistics were calculated by comparison of the LiDAR bare earth points to the ground surveyed QA/QC points.

Table 4.1: Overall Vertical Accuracy Statistics

Average error	0.000	meters
Minimum error	-0.076	meters
Maximum error	0.117	meters
Average magnitude	0.041	meters
Root mean square	0.049	meters
Standard deviation	0.050	meters

Table 4.2: QA/QC Analysis UTM 16N, NAD83


Point ID	Easting (UTM meters)	Northing (UTM meters)	Elevation (meters)	Laser Elevation (meters)	Dz (meters)
6001	595440.522	4767803.605	212.34	212.28	-0.06
6002	596056.047	4761964.74	212.992	212.94	-0.052
6003	595127.481	4756131.733	211.731	211.71	-0.021
6004	595537.098	4750283.313	198.233	198.23	-0.003
6005	608622.699	4767827.472	221.196	221.12	-0.076
6006	596143.2	4744449.68	229.845	229.94	0.095
6007	603096.895	4742670.81	220.296	220.27	-0.026
6008	602095.178	4760054.658	222.87	222.81	-0.06
6009	615652.304	4744691.174	226.084	226.14	0.056
6010	623701.247	4769633.146	263.869	263.85	-0.019
6011	623169.247	4762756.896	258.445	258.42	-0.025
6012	624560.471	4754521.434	231.16	231.16	0
6013	625048.075	4747595.377	234.763	234.81	0.047
6014	609017.882	4756705.796	196.826	196.88	0.054
QC_1	602711.824	4765985.482	237.52	237.49	-0.03
QC_2	599782.351	4757799.272	221.908	221.86	-0.048
QC_3	602654.057	4754171.132	184.024	184.09	0.066
QC_4	603531.601	4748206.808	204.342	204.4	0.058
QC_5	600931.62	4745884.428	208.293	208.29	-0.003
QC_6	612426.796	4745573.337	233.127	233.16	0.033
QC_7	617040.965	4748325.498	222.843	222.96	0.117
QC_8	615472.811	4755152.329	228.446	228.42	-0.026
QC_9	620411.636	4760258.847	198.037	198.03	-0.007
QC_10	621359.845	4765040.9	267.951	268.01	0.059

Point ID	Easting (UTM meters)	Northing (UTM meters)	Elevation (meters)	Laser Elevation (meters)	Dz (meters)
GRR01_12	603714.47	4764144.057	225.17	225.15	-0.02
GRR03_12	611473.245	4765897.853	205.863	205.85	-0.013
GRR05_12	614270.004	4761099.169	251.574	251.52	-0.054
GRR12_12	621773.33	4757453.128	207.251	207.23	-0.021
GRR13_12	620333.037	4751981.576	238.731	238.75	0.019
GRR14_12	613424.248	4752185.77	219.256	219.31	0.054
GRR15_12	608877.056	4751243.221	207.568	207.52	-0.048
GRR16_12	604843.949	4752080.391	191.948	191.89	-0.058

## VERTICAL ACCURACY CONCLUSIONS

- Data Accuracy tested 0.049 meters RMSE.

Based on the analysis of the LiDAR data, the accuracy of the data meets the task order requirements.

Approved By:			
Title	Name	Signature	Date
Associate Member LiDAR Specialist Certified Photogrammetrist #1281	Qian Xiao		November 27, 2012

# SECTION 5: FINAL DELIVERABLES

## FINAL DELIVERABLES

The final deliverables are listed below:

- One set of LiDAR data reflective surface tiles in 1 meter ArcGRID format in 2,000 meter x 2,000 meter overlapping tiles.
- One set of LiDAR data bare earth tiles in 1 meter ArcGRID format in 2,000 meter x 2,000 meter overlapping tiles.
- One set of LiDAR data last return tiles in 1 meter ArcGRID format in 2,000 meter x 2,000 meter overlapping tiles.
- One set of LiDAR data intensity tiles in 1 meter ArcGRID format in 2,000 meter x 2,000 meter overlapping tiles.
- LAS v1.2 classified point cloud and bare earth point files in tile format.
- The project data was delivered on a USB Drive.



**WOOLPERT**

DESIGN | GEOSPATIAL | INFRASTRUCTURE